



Marking and codifying systems


Computerized labelling

Automatic and semi-automatic labelling  
machines

End-of-line automations

# GMPM-XT / GMPM-BR-XT

## Automatic labeling machine

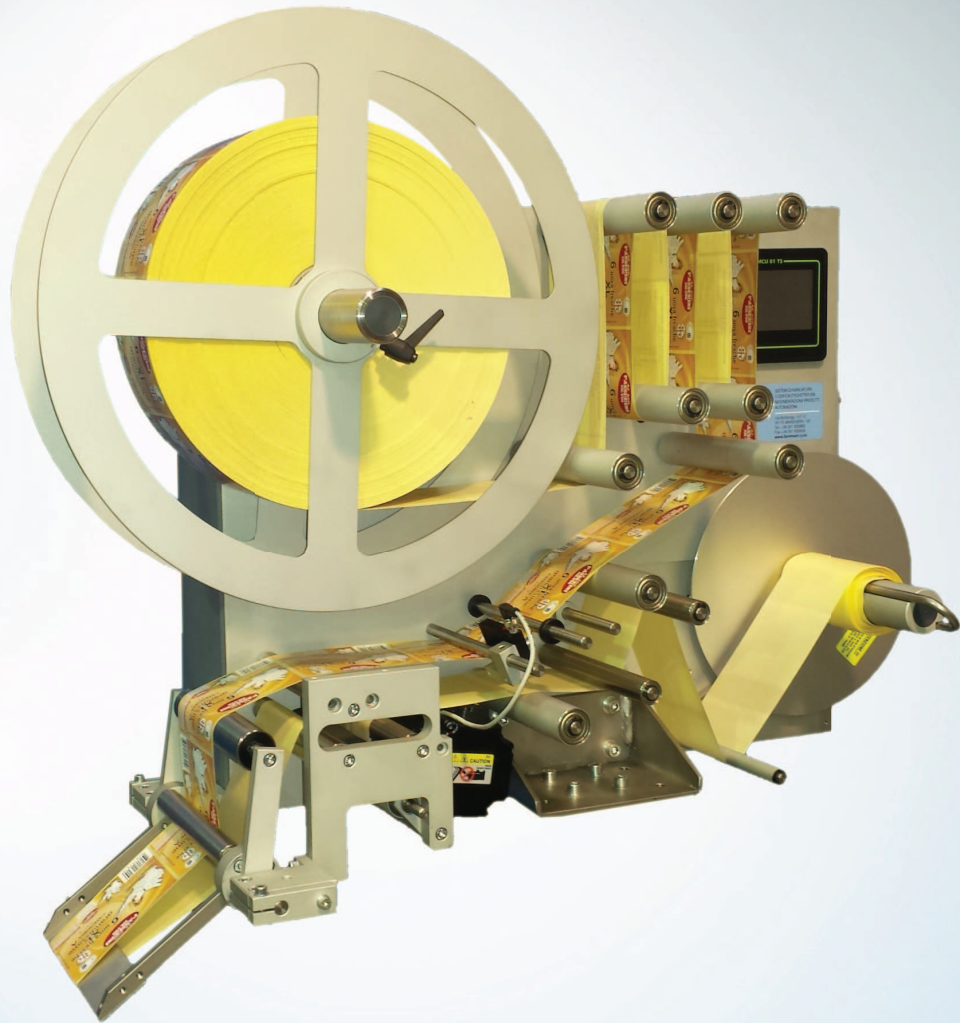

### MAIN FEATURES


- Automatic labeling machine with great label autonomy
- Reel holder, rewinder and e driving roller are all motorized independently
- Independent motorization allows to mount a reel with greater outer diameter
- Electronics integrated in machine body
- Parameter setting and status monitoring via color display touch screen
- Available in brushless motor version (GMPM-BR-XT), reaching a speed of 100 mt/min.

# GMPM-XT / GMPM-BR-XT

## Automatic labeling machine

### TECHNICAL FEATURES

Voltage supply:	240 V, 50 HZ
Engine type:	Standard version: 3 separate stepper motors (for reel, roller and rewinder) BR version: brushless driving motor, 2 separate stepper motors
Label drag speed:	Variable from 1 to 60 m/min. (up to 100 m/min. for BR version)
Maximum label width:	100 mm. for base version (50, 120, 160 or 220 mm on request)
Maximum label roll diameter:	450 mm
Internal label roll diameter:	40 mm. (Diam. 76 mm with adapter)
Label detection:	Variable sensitivity photocell
Product detection:	Photocell - PLC start - Micro switch
Electronics integrated on machine body	
Electronic controller with color touch screen and graphic interface	
Overall size (base):	Length 790 mm. Height 620 mm. Width 330 mm.
Weight:	25 Kg

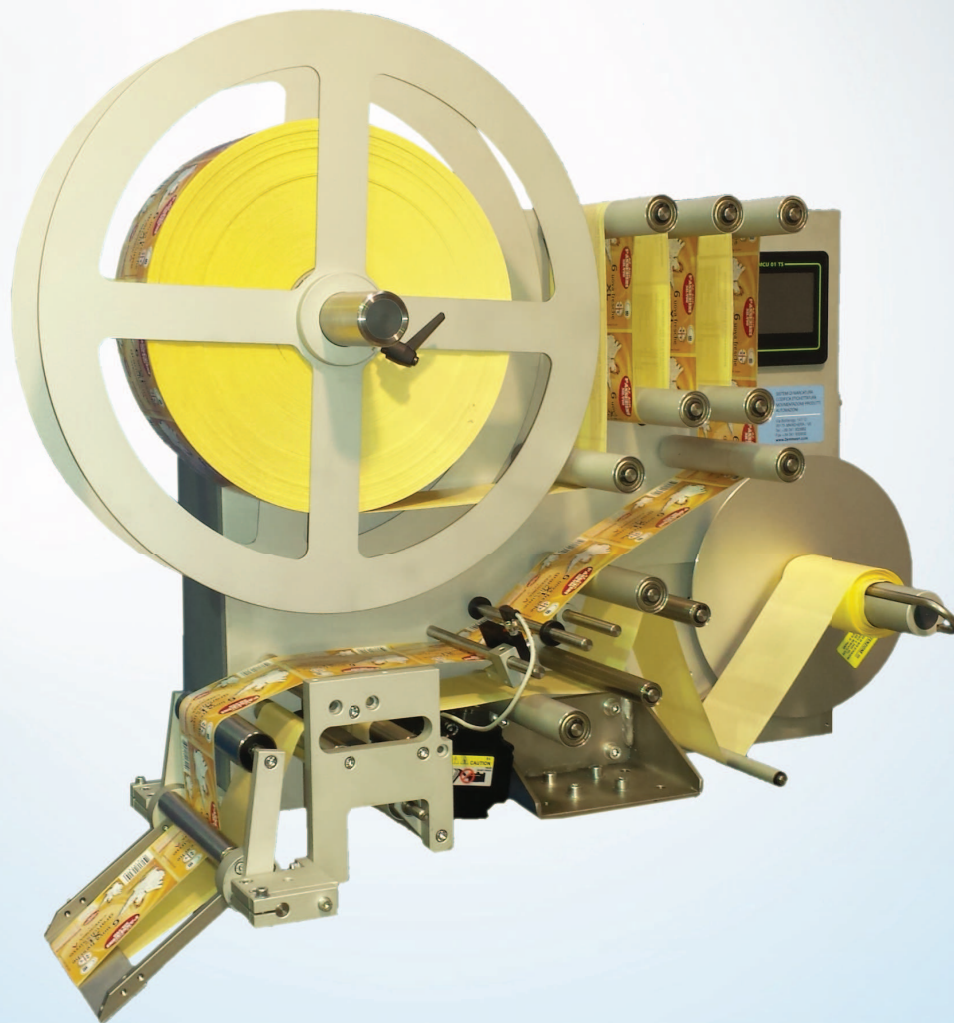

2emme S.r.l.  
Via Bottenigo 147/O, 30175, Marghera (VE)  
Telefono: +39 041 932660  
Fax: +39 041 930000  
Sito Web: [www.2emmesrl.com](http://www.2emmesrl.com)  
Indirizzo e-mail: [info@2emmesrl.com](mailto:info@2emmesrl.com)